

SDN Product Specifications




SOMFY SYSTEMS, INC
609-395-1300
609-395-1776

4 Conductor Modular Cable

Revision No.

Date

Part No.

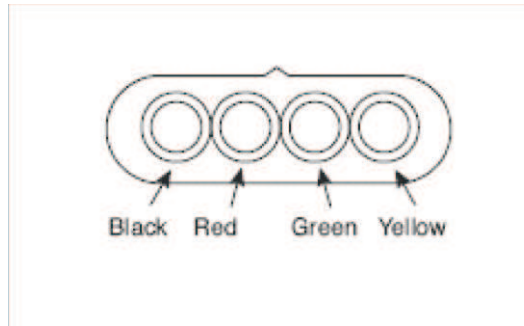

4 Conductor Modular Cable with RJ9 Connectors

	1 ft. Cable	9013349		
	2 ft. Cable	9209061		
	25 ft. Cable	9012343		
	50 ft. Cable	9012344		

Bulk Cable w/o terminations

SPECIFICATIONS	
Type:	1000 ft. spool flat modular telephone
Conductors:	26 AWG, 7x34 stranded tinned copper
Insulator:	polypropylene
Jacket:	PVC
Voltage:	150V
Passes:	CM vertical flame test
Temperature rating:	60°C
Acceptable current:	1.8A
Conductor resistance:	<2Ω/m
Insulation resistance:	>100MΩ
Dielectric withstand voltage:	>500VAC (between adjacent conductors)
Capacitance/ft:	19.95~20.94pF, 25pFmax. (between conductors)
Tensile strength:	Insulation: Min. 1.0kg/mm ² mm (square mm) Jacket: 1.3kg/mm ² mm (square mm)
Elongation:	Insulation: Min. 200% Jacket: Min. 100%
Hardness of jacket:	PVC 60P
RoHS Compliant	