

# SDN Product Specifications




SOMFY SYSTEMS, INC  
609-395-1300  
609-395-1776

## 4 Conductor Modular Cable

Revision No.

Date

Part No.

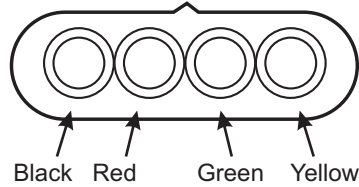

4 Conductor Modular Cable with RJ9 Connectors

1 ft. Cable	9013349		
5 ft. Cable	9209061		
25 ft. Cable	9012343		
50 ft. Cable	9012344		

### Bulk Cable w/o terminations

SPECIFICATIONS	
Type:	1000 ft. spool flat modular telephone
Conductors:	26 AWG, 7x34 stranded tinned copper
Insulator:	Polypropylene
Jacket:	PVC
Voltage:	150V
Passes:	CM vertical flame test
Temperature rating:	60°C
Acceptable current:	1.8A
Conductor resistance:	<math><2\Omega/m</math>
Insulation resistance:	>100M $\Omega$
Dielectric withstand voltage:	>500VAC (between adjacent conductors)
Capacitance/ft:	19.95~20.94pF, 25pF max. (between conductors)
Tensile strength:	Insulation: Min. 1.0kg/mm x mm (square mm) Jacket: 1.3kg/mm x mm (square mm)
Elongation:	Insulation: Min. 200% Jacket: Min. 100%
Hardness of jacket:	PVC 60P
	RoHS Compliant